

Pumps for circulation of above ground swimming pools

Basic



Applications

Recirculation of small portable pools and aquariums.

Materials

Pump Body

Glass loaded polypropylene.

Impeller

Glass loaded Noryl.

Motor Shaft

Stainless steel. AISI 420.

Mechanical Seal


Graphite and alumine.

Motor


Classe F insulation.
IP 55 Protection.
Continuous operation.
Built-in thermal protection.

Equipment

Suction and discharge tails to suit
32 - 38 mm diameter flexible pipes.

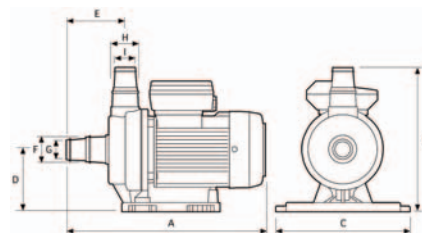

	A	B	C	D	E	F	G	H	I	Kg
Basic	305	219	204	94	90	38	32	38	32	4.5

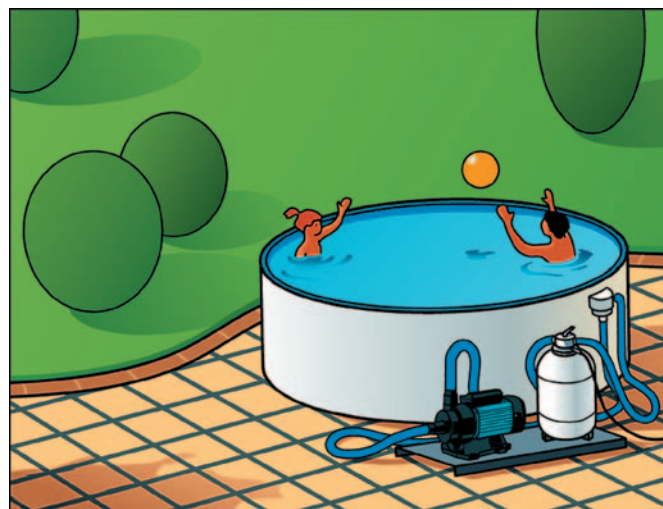

Single phase	A			P1 (kW)		kW	HP	µF	Flow [m³/h]	Manometric head [m]							
	1~ 230 V	3~ 230 V 400 V		1~	3~					2	2,5	3	3,5	4	4,5	5	5,5
Basic	1.4	-	-	0.24	-	0.15	0.2	6	5.8	5	4.3	3.5	3.2	2.5	1.6	0.8	

Reversed Table