




Multipool Plus

High pressure pumps for pools

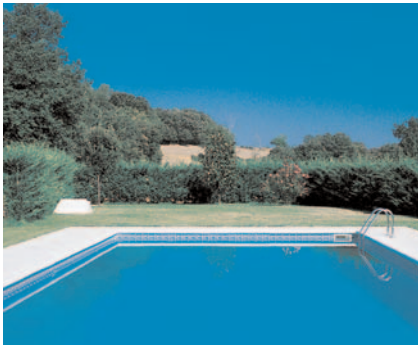

+ Sea water

+ Low noise levels

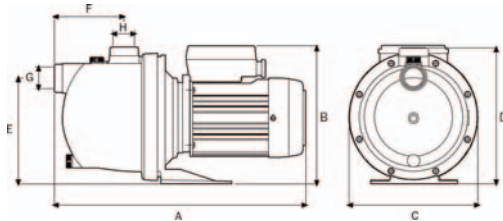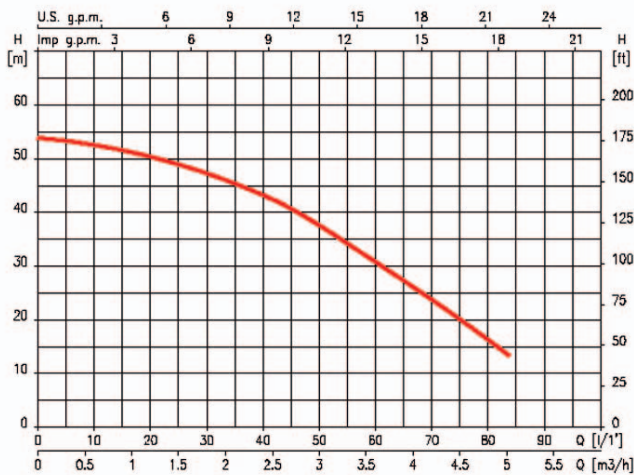

Pressure gauge with rotating glass.

Applications

Operation with swimming pool cleaners, sea water, chlorinated water, demineralized water and ozonic water.

Materials

Pump Body

Glass loaded polymer (Noryl).

Impeller

Stainless steel. AISI 316.

Diffuser

Glass loaded polymer (Noryl).

Motor Shaft

Stainless steel. AISI 316.

Mechanical Seal

Graphite and alumine.

Motor

Class F insulation.

IP 55 Protection.

Continuous operation.

Single phase with built-in thermal protection.

Equipment

Flow regulator valve and pressure gauge with rotating glass and position signal.

	A	B	C	D	E	DNa	DNm	Kg
Multipool Plus	415	247.5	190	155	105	1"	1"	10.1

Single phase	Three phase	A		P1 (kW)		kW	HP	µF	1/1'							
		1~	3~	1~	3~				m³/h							
		230 V	400 V	1~	3~				0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
Multipool Plus M	Multipool Plus T	5.8	2.3	1.3	1.2	0.75	1	16	53	51	47	43	37	32	24	17