

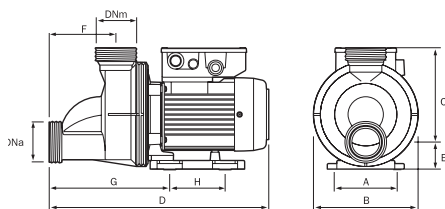
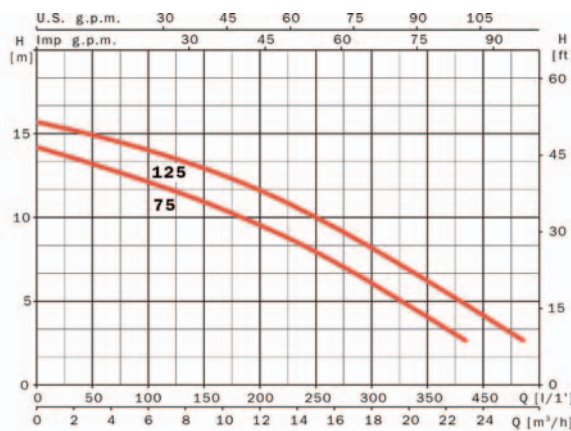


# Tiper 0

## Hydromassage pumps

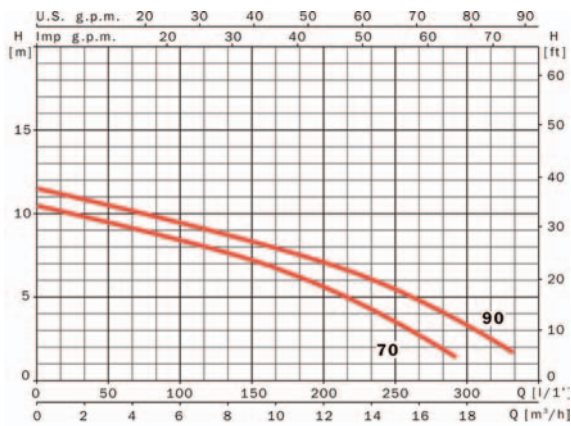

	A	B	C	D	E	F	G	H	DNa	DNm	Kg
<b>Tiper0 70</b>	100	102	154.5	312	47	88	130	74	2 <sup>1/4</sup> "	2 <sup>1/4</sup> "	3.9
<b>Tiper0 90</b>	100	101	154.5	312	47	88	130	74	2 <sup>1/4</sup> "	2 <sup>1/4</sup> "	4.4

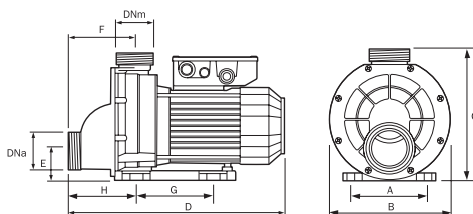

	A	B	C	D	E	F	G	H	DNa	DNm	Kg
<b>Tiper2 75</b>	124	187	215	378	50	120	120	130	2 <sup>1/4</sup> "	2 <sup>1/4</sup> "	8,3
<b>Tiper2 125</b>	124	187	215	378	50	120	120	130	2 <sup>1/4</sup> "	2 <sup>1/4</sup> "	9,4

### Applications

For use with hydromassage systems.

### Materials

**Pump Body**

Polypropylene

**Impeller**

Noryl

**Motor Housing**

Aluminium L-2521

**Mechanical Seal**

Graphite and Aluminium Oxide.

### Motor

Insulation resistance 3750 V.

Class F Insulation.

Protection IP 55.

Continuous operation.

Built-in thermal protection.

### Equipment

Complete with suction and discharge connections, metric or imperial.

### Options

On/off switch rear connection and level sensors via pneumatic or electrical devices.

Variable speed MV version also available.

Single phase	A	P1 (kW)		kW	HP	µF
		1~ 230 V	3~			
<b>Tiper 0 70 M</b>	2.9	0.64	-	0.37	0.5	12
<b>Tiper 0 90 M</b>	3.7	0.85	-	0.75	1.0	12

Single phase	A	P1 (kW)		kW	HP	µF
		1~ 230 V	3~			
<b>Tiper 2 75 M</b>	5.3	1.2	-	0.55	0.75	16
<b>Tiper 2 125 M</b>	5.6	1.5	-	0.9	1.25	16

See our whirlpool accessories catalogue for full details