

Automatic high pressure pumps for pools

# Multipool Tronic



## Applications

Operation with swimming pool cleaners, sea water, chlorinated water, demineralized water and ozonic water.

## Materials

### Pump Body

Glass loaded polymer (Noryl).

### Impeller

Stainless steel. AISI 316.

### Diffuser

Glass loaded polymer (Noryl).

### Motor Shaft

Stainless steel. AISI 316.

### Mechanical Seal

Graphite and alumine.

## Motor

Class F insulation.

IP 55 Protection.



Continuous operation.

Single phase with built-in thermal protection.

## Equipment

Electronic programmer which controls automatic operation of the pump.

Flow regulator valve and pressure gauge with rotating glass and position signal.

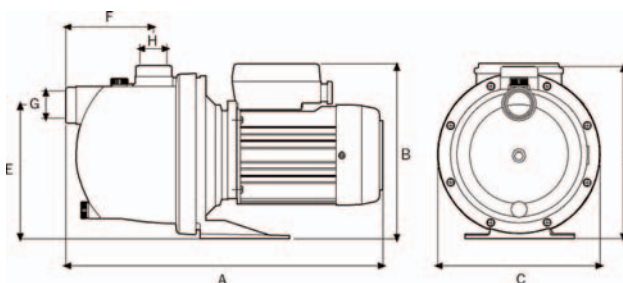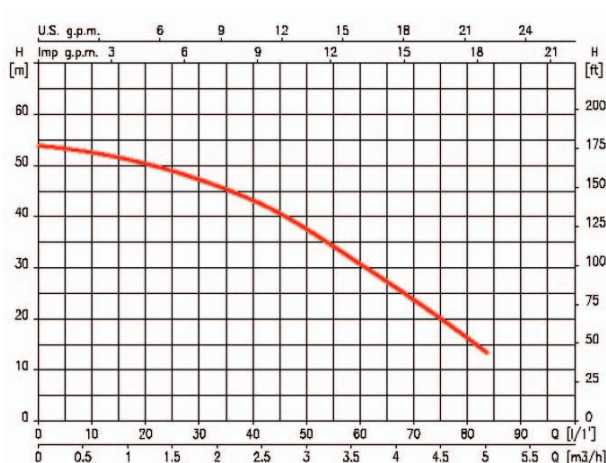

	A	B	C	D	E	F	G	H	Kg
<b>Multipool Tronic</b>	370	203.5	190	201	155	103	1"	1"	10.1

230 V 50 Hz	A		P1 (kW)		kW	HP	µF
	1~ 230 V	3~ 230 V / 400 V	1~	3~			
<b>Multipool Tronic M</b>	5.8		1.3		0.75	1	16

	1/1'	10	20	30	40	50	60	70	80
<b>Single phase</b>		m³/h 0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
<b>Multipool Tronic</b>		53	51	47	43	37	32	24	17